


## BURNING / THERMAL LANCE HOLDER

for Burning/ Thermal Lances 12 mm – 34 mm

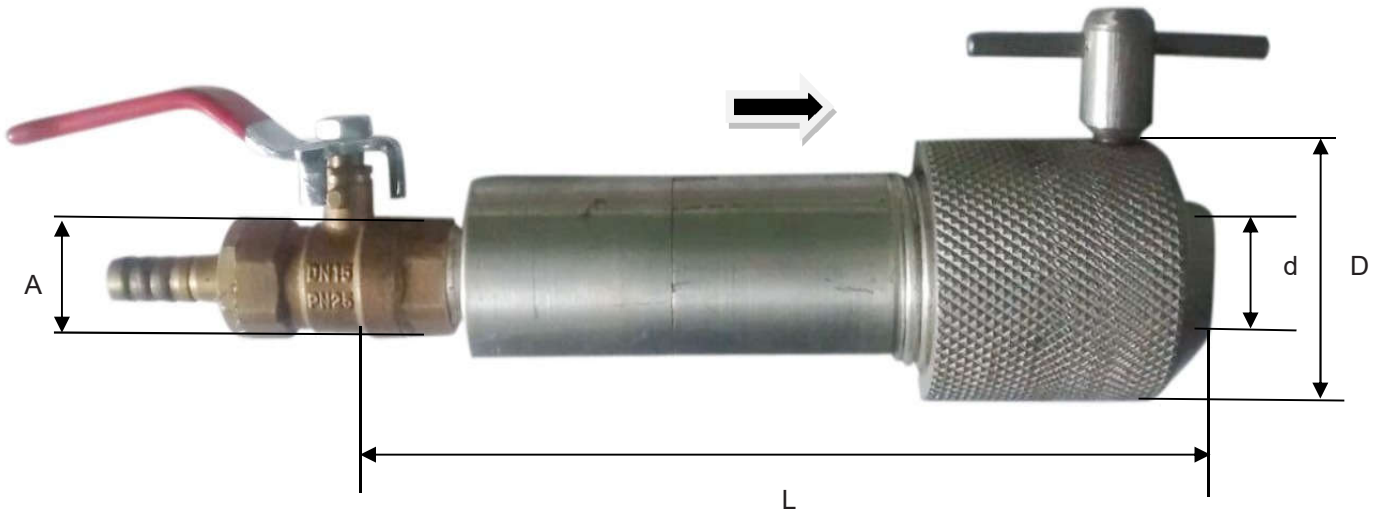

### Lance Holder for oxygen

All material in contact with oxygen is aluminum & brass. Seals manufactured from abrasion resistant, self extinguishing rubber. Ensures security if inserted lance by the combination of clamp and rubber sleeve. In built flame arrestor for safety.

d Ø Lance		Lance tolerance Ø [mm]	A Inlet connection male with cone [EN 560]	D [mm]	L [mm]	Weight [g]	Max. working pressure [bar]
[mm]	[inch]						
13	1/4"	12.0 - 13.7	1/2"	50	180	600	Oxygen (O) 25.0
17	3/8"	16.0 - 17.2	1/2"	50	180	600	
21	1/2"	20.0 - 21.5	1/2"	50	180	600	
27	3/4"	26.0 - 27.5	3/4"	76	250	1,900	
34	1"	32.3 - 34.5	3/4"	76	250	1,900	

Other connections available upon request

Add: F - 301, Remi Bizcourt, Shah Industrial Estate, Off Veera Desai Road, Andheri (W), Mumbai - 400 053,

Maharashtra, India., Tel : HO- 022-26731083/40211346 || Factory - 07738044052

Email : [factory@kandi.co.in](mailto:factory@kandi.co.in), [info@kandi.co.in](mailto:info@kandi.co.in) WebSite : [www.kandi.co.in](http://www.kandi.co.in)